


PRODUCT DATA SHEET

MALE / FEMALE INSULATED PIGGY BACK DISCONNECTS

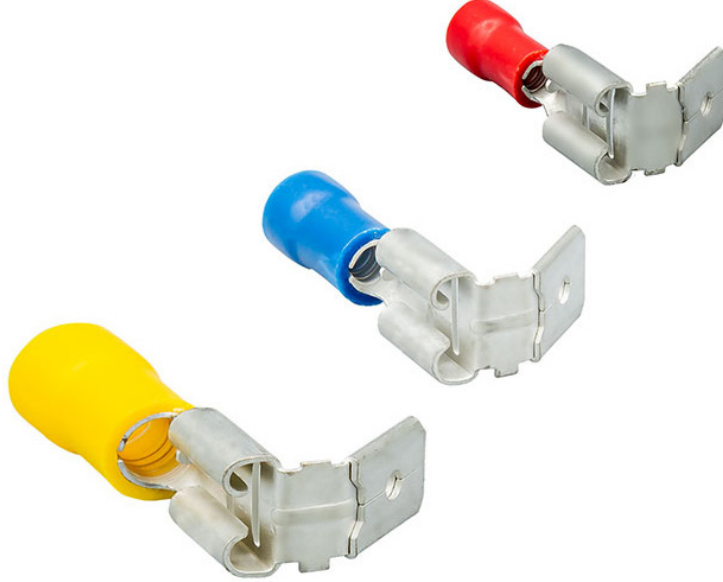

DESCRIPTION

Male / Female Insulated Piggy Back Disconnects are designed for pleated connection. Extra spindle tab allows additional circuits to be easily added to existing connections.

FEATURES

- | | |
|-------------------------|---------------------------------|
| - Standard | : DIN 46237 |
| - Material | : Brass, Tin Plating |
| - Insulation | : PVC |
| - Operating Temperature | : Maximum From 75° to 600 Volts |

MARKINGS




- It complies with RoHS standards.
- It complies with UKAS Quality Management standards.
- It complies with CE standards.
- It complies with UL standards.

PRODUCT DATA SHEET

MALE / FEMALE INSULATED PIGGY BACK DISCONNECTS

SECTIONS AND DIMENSIONS



PRODUCT CODE	COLOUR	CABLE SECTION (mm ²)	SOCKET WIDTH	DIMENSIONS (mm)				
				W	F	L	B	D
GFDEG - 1861	Red	0.50 - 1.50 mm ²	0.8 x 6.35	6.6	8.0	22.5	10.5	3.8
GFDEG - 2862	Blue	1.50 - 2.50 mm ²	0.8 x 6.35	6.6	8.0	22.5	10.5	4.7
GFDEG - 5866	Yellow	4.00 - 6.00 mm ²	0.8 x 6.35	6.6	8.0	24.0	13.0	6.2