

PRODUCT DATA SHEET

CONNECTING TUBES



DESCRIPTION

Connecting Tubes ensure the continuity of electrical conductivity by connecting energy cables with two or more conductors to each other.

FEATURES

- Made of copper material in accordance with EN/13600 standards.
- Annealed copper pipes are used during production.
- Copper with 99.9% conductivity is used in production.
- 100% Tin coating is made in the range of 5-8 Microns.


MARKINGS



- It complies with CE standards.
- It complies with RoHS standards.
- It complies with ISO 9001 standards.
- Domestic Production.

PRODUCT DATA SHEET

CONNECTING TUBES

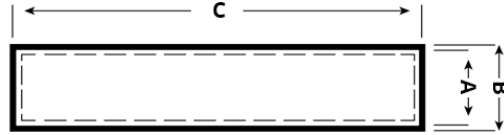

SECTIONS AND DIMENSIONS

PRODUCT CODE	CABLE SECTION (mm ²)	DIMENSIONS		
		A	B	C
EKMUF - 10	10	4.7	6.6	30.0
EKMUF - 16	16	5.5	7.0	35.0
EKMUF - 25	25	7.0	9.0	40.0
EKMUF - 35	35	8.5	10.5	45.0
EKMUF - 50	50	10.0	12.0	50.0
EKMUF - 70	70	11.5	14.0	55.0
EKMUF - 95	95	13.5	16.0	60.0
EKMUF - 120	120	15.5	18.0	65.0
EKMUF - 150	150	16.5	20.0	70.0
EKMUF - 185	185	18.5	22.0	75.0
EKMUF - 240	240	21.5	25.5	85.0
EKMUF - 300	300	23.5	28.5	100.0