

PRODUCT DATA SHEET

DUAL WALL HEAT SHRINKABLE TUBES



DESCRIPTION

Heat Shrinkable Tubes is a method of encasing wires or cables in an insulation tube to protect the wires from external disturbances. May also be called Heat Shrink Sleeves. The heat shrink process is simpler than you think, place the wire where you need insulation and heat the sleeve.

FEATURES

Material:	Polyolefin
Shrink Ratio:	3/1
Non-flammability:	Self-extinguishing
Operating Temperature:	-55°C -- +125°C

MARKINGS




- It complies with RoHS standards.
- It complies with UL Listed standards.
- It complies with UL Recognized standards.
- It complies with CE standards.
- It complies with CSA standards.
- It complies with Halogen-Free Winding Wires standards.

PRODUCT DATA SHEET

DUAL WALL HEAT SHRINKABLE TUBES

SECTIONS AND DIMENSIONS

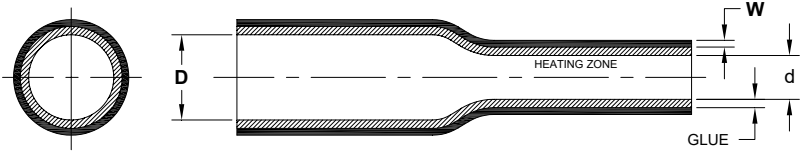

ORDER CODE	SIZE mm	BEFORE CONTRACTION (mm)	AFTER CONTRACTION (mm)		
		İÇ ÇAP	Maximum Inner Diameter	Nominal Wall Thickness	Nominal Sticky
4418	3/1	3	1.00	1.10 ± 0.10	0.50
4419	4.8/1.5	4.8	1.50	1.20 ± 0.10	0.50
4420	6/2	6	2.00	1.30 ± 0.10	0.50
4421	9/3	9	3.00	1.70 ± 0.15	0.60
4405	12/4	12	4.00	2.00 ± 0.20	0.80
4406	16/5	16	5.00	2.20 ± 0.20	0.80
4407	19/6	19	6.00	2.30 ± 0.20	0.80
4408	28/9	28	9.00	2.40 ± 0.20	1.05
4409	33/10	33	10.00	2.50 ± 0.20	1.05
4410	40/12	40	12.00	2.50 ± 0.20	1.05
4411	44/14	44	14.00	2.50 ± 0.20	1.05
4412	52/18	52	18.00	2.50 ± 0.20	1.05
4414	70/25	70	25.00	3.00 ± 0.30	1.35
4415	90/30	90	30.00	3.00 ± 0.30	1.35
4416	125/40	125	40.00	3.00 ± 0.30	1.35